

BH100-01/BH100-02 1000VDC / 1100 VDC Fuse Holder




FEATURES

ADLER BH100-01/BH100-02 touch safe fuse holders are designed for all standard 10x38mm PV fuses such as ADLER A73 / A83 series.

Indicator Option: BH100-02 has Visual Indicator.

Note: SCCR is limited to the interrupting rating of the installed fuse or 30kA whichever is less.

DIMENSIONS (mm)

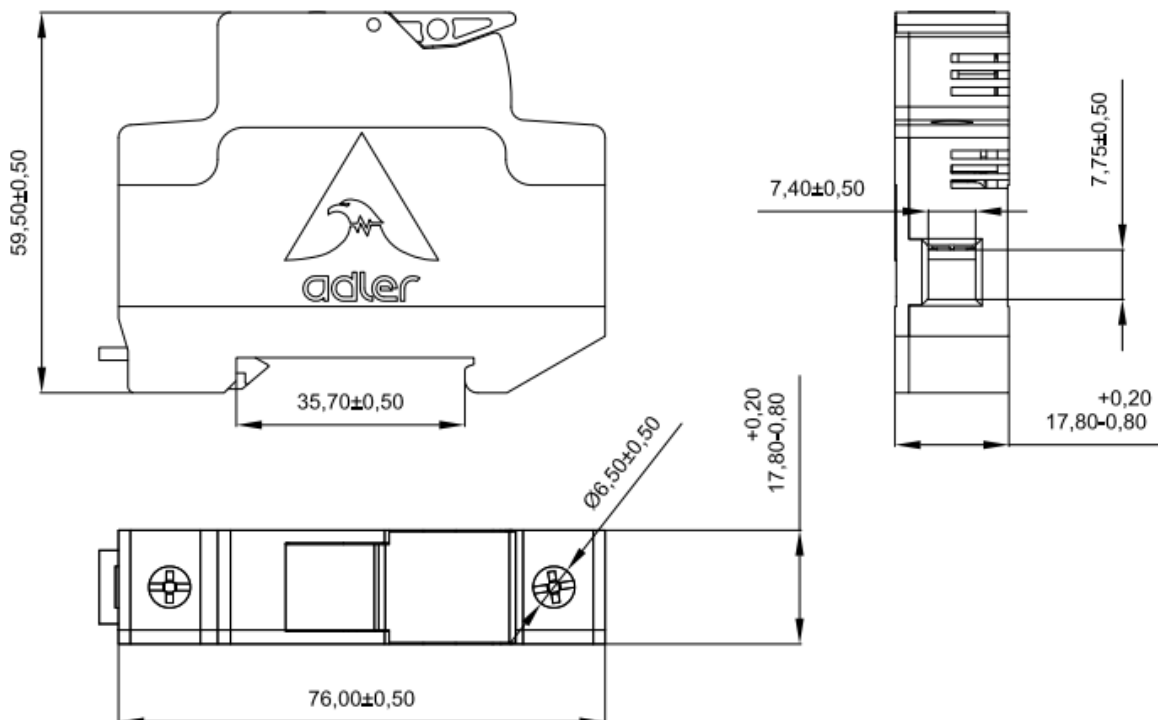



DESCRIPTION

BH100-01/BH100-02 touch safe holders are designed for 10x38mm DC midjet fuses, especially for use with photovoltaic equipment.

SPECIFICATIONS:

- Rated Voltage: 1000 Vdc / 1100 Vdc
- Rated Current: up to 32A
- Short Circuit Current Rating (SCCR):
DC 30kA@1000 Vdc / 20kA@1100 Vdc
- Standards: UL 4248-19, EN 60947-3
- Wire Range: 18 - 8 AWG
- Max. Torque: 3.4 N m
- Max. Power Dissipation: 6 W
- Rated Impulse Withstand Voltage (Uimp): 8kV
- Shell Material: PBT(B206)
- Temperature Tolerance (RTIstr): -40°C to +90°C
- Material Flammability: UL 94-V0
- Mounting: DIN Rail mounting
- Degree of protection IP20
- UL and CSA (C22.2 N0. 4248.19) Listed File E486822, Rated Voltage 1000VDC / 1100VDC
- TUV File: R 50393963

PRODUCT LABELLING

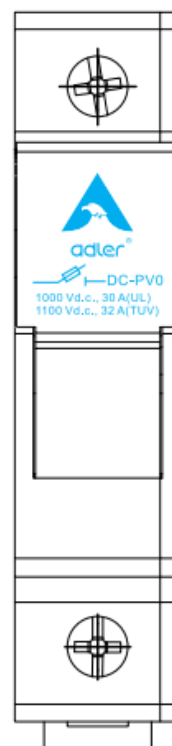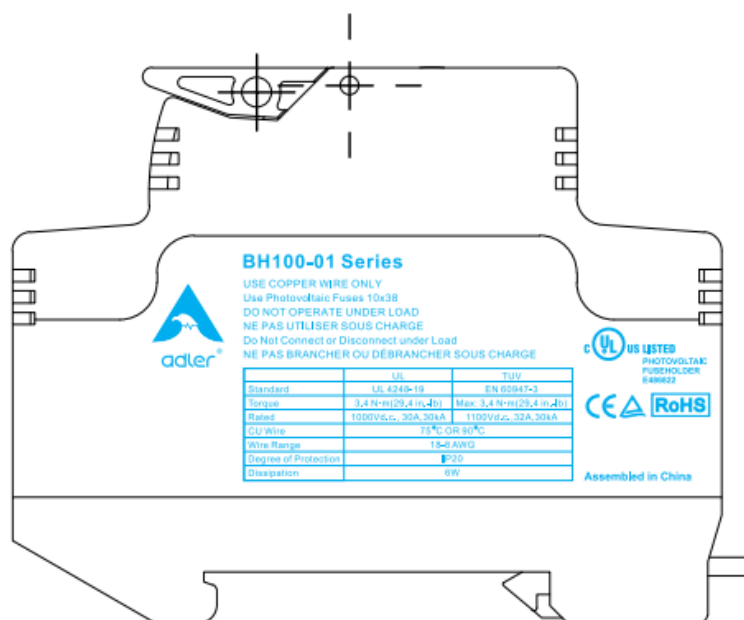

WEB RESOURCES

Download the latest technical documents: www.adlerelectric.com. Specifications are subject to change without notice.